

www.soval.com
P: 888-877-6825
F: 305-758-8711

1065 Series
Air Valve (Sewer)



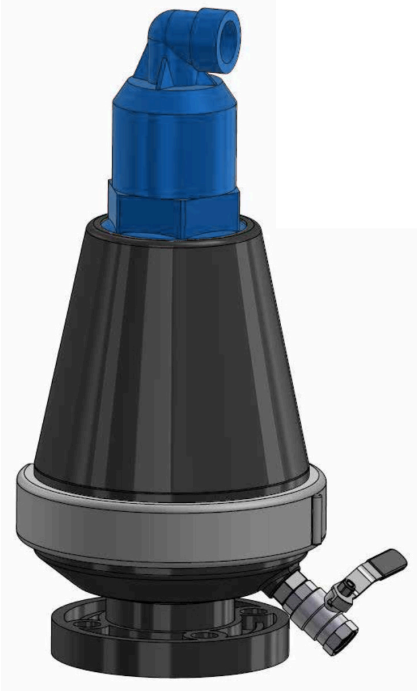

TRIPLE-ACTING

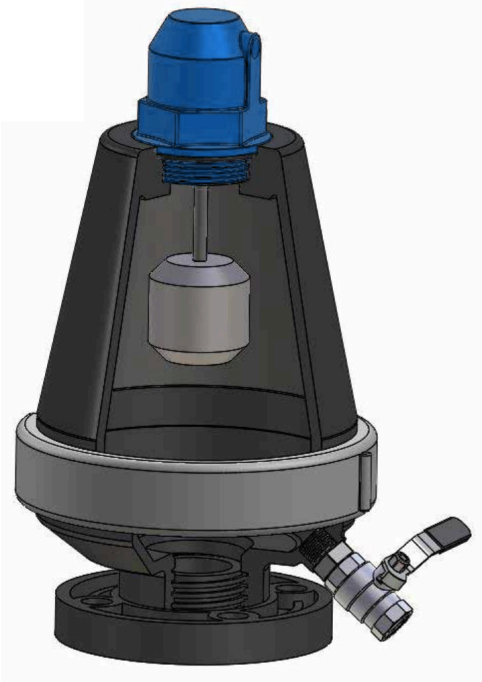

DOUBLE-ACTING

SPECIFICATIONS		
WORKING PRESSURE		7.5–160 PSI
WORKING TEMPERATURE		39.2–140°F
CONNECTION	FLANGED	ISO 7005-2
	THREADED	ISO (BSP), ANSI (NPT)
	GROOVED	OGS GUTTER SPECIFICATIONS 25.01


All information contained herein is supplied by manufacturer and deemed to be accurate. Information is subject to change without notice. Purchaser is responsible for proper installation, use and maintenance of product. Southern Valve & Fitting USA, Inc. passes on manufacturer's warranty but extends no other warranty. All products sold by Southern Valve & Fitting USA, Inc. are subject to its full terms and conditions of sales as published and available on request. Any warranty made extends to original purchaser and is not assignable or transferable.

www.soval.com
P: 888-877-6825
F: 305-758-8711


1065 Series
Air Valve (Sewer)

GRAPHS FOR TRIPLE-ACTING


Air intake

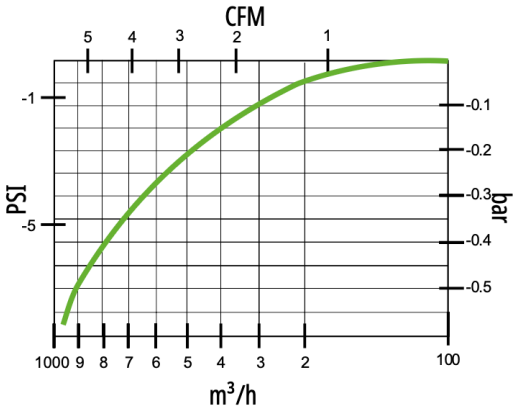

Air Release

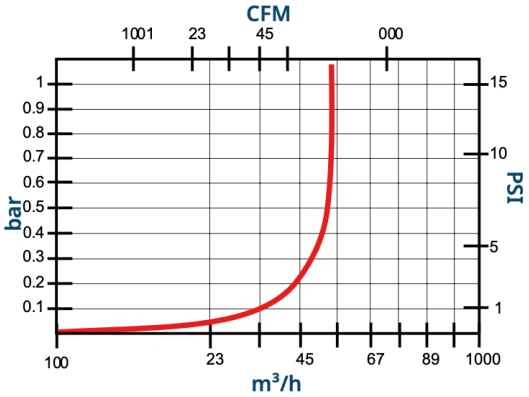


Air Release - Automatic Valve

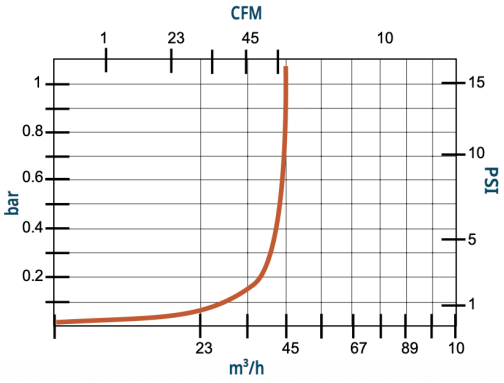


GRAPHS FOR DOUBLE-ACTING

Air intake

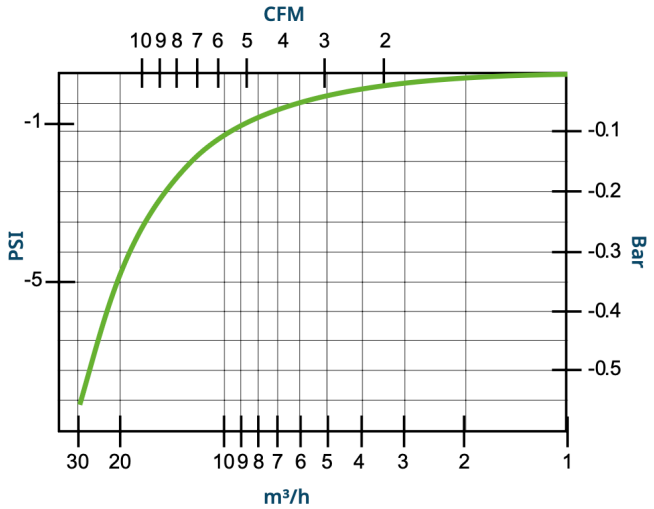

Air Release

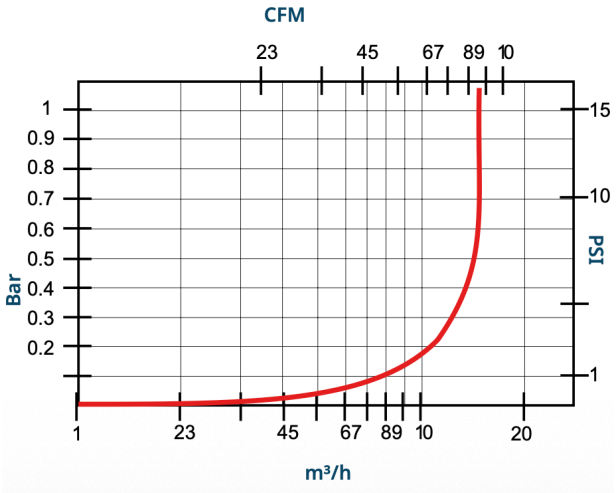


All information contained herein is supplied by manufacturer and deemed to be accurate. Information is subject to change without notice. Purchaser is responsible for proper installation, use and maintenance of product. Southern Valve & Fitting USA, Inc. passes on manufacturer's warranty but extends no other warranty. All products sold by Southern Valve & Fitting USA, Inc. are subject to its full terms and conditions of sales as published and available on request. Any warranty made extends to original purchaser and is not assignable or transferable.

www.soval.com
P: 888-877-6825
F: 305-758-8711

1065 Series
Air Valve (Sewer)

MEASUREMENTS (TRIPLE-ACTING)

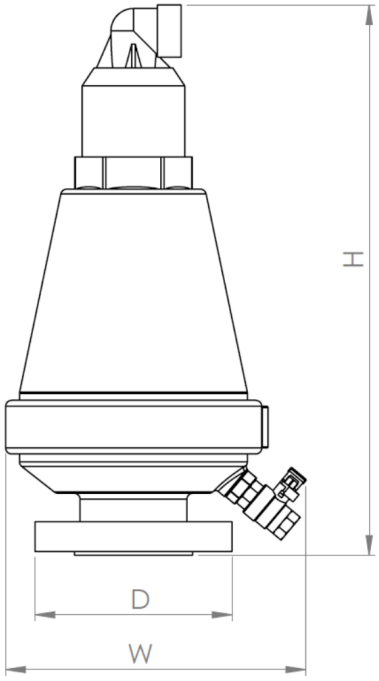


FLANGED			(INCHES)
SIZE	D	W	H
2"	6.5	9.84	18.3
2 1/2"	7.28	9.84	18.3
3"	7.87	9.84	18.3
4"	8.86	9.84	18.3

THREADED			(INCHES)
SIZE	D	W	H
1"	NPT	9.84	16.34
1 1/2"	NPT	9.84	16.34
2"	NPT	9.84	16.53
2 1/2"	NPT	9.84	16.73
3"	NPT	9.84	18.30
4"	NPT	9.84	18.30

GROOVED			(INCHES)
SIZE	D	W	H
1 1/2"	1.90	9.84	16.34
2"	2.37	9.84	16.53
2 1/2"	3.00	9.84	16.53
3"	3.50	9.84	16.53
4"	4.50	9.84	16.53

MEASUREMENTS (DOUBLE-ACTING)

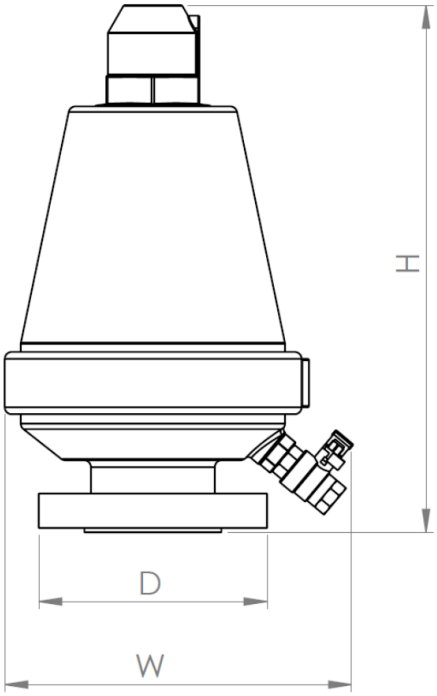

FLANGED			(INCHES)
SIZE	D	W	H
2"	6.5	9.84	14.96
2 1/2"	7.28	9.84	14.96
3"	7.87	9.84	14.96
4"	8.86	9.84	14.96

THREADED			(INCHES)
SIZE	D	W	H
1"	NPT	9.84	12.79
1 1/2"	NPT	9.84	12.79
2"	NPT	9.84	12.99
2 1/2"	NPT	9.84	13.19
3"	NPT	9.84	13.19
4"	NPT	9.84	13.19

GROOVED			(INCHES)
SIZE	D	W	H
1 1/2"	1.90	9.84	12.99
2"	2.37	9.84	13.19
2 1/2"	3.00	9.84	13.19
3"	3.50	9.84	13.19
4"	4.50	9.84	13.19

All information contained herein is supplied by manufacturer and deemed to be accurate. Information is subject to change without notice. Purchaser is responsible for proper installation, use and maintenance of product. Southern Valve & Fitting USA, Inc. passes on manufacturer's warranty but extends no other warranty. All products sold by Southern Valve & Fitting USA, Inc. are subject to its full terms and conditions of sales as published and available on request. Any warranty made extends to original purchaser and is not assignable or transferable.